



GLAZING TYPE

STANDARD ACRYLIC

	Approx Light Transmission
CLEAR/ CLEAR	84%
WHITE/ CLEAR	33%
BRONZE/ CLEAR	25%
OTHER	

LOW E GLASS

CLEAR	68%
GREY	34%

IMPACT MODIFIED ACRYLIC

CLEAR/ CLEAR	84%
WHITE/ CLEAR	33%

POLYCARBONATE

CLEAR/ CLEAR	84%
GREY/ CLEAR	50%
BRONZE/ CLEAR	50%


OTHER

MULTIWALL POLYCARBONATE

CLEAR	65%
BRONZE	30%
WHITE	40%

Residential

Commercial

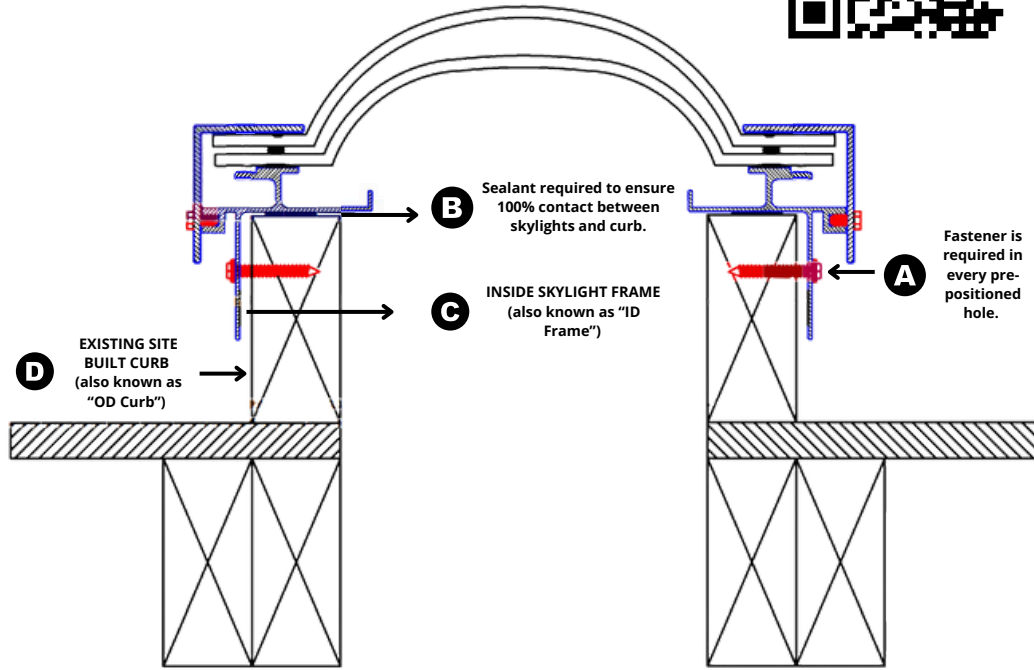

NOTES

- A** Fastener is required in every pre-positioned hole.
- B** Sealant required to ensure 100% contact between skylights and curb.
- C** INSIDE SKYLIGHT FRAME (also known as "ID Frame")
- D** EXISTING SITE BUILT CURB (also known as "OD Curb")

FRAME COLOR

MILL (UNFINISHED ALUMINUM)

ANODIZED BRONZE

SKYLIGHT DIMENSION

C INSIDE DIMENSION OF SKYLIGHT FRAME

D OUTSIDE DIMENSION OF CURB

L x W =

QUANTITY =

YOUR CONTACT INFORMATION

NAME:

COMPANY:

EMAIL:

PHONE: